ADAPTIVE METHOD AND APPARATUS FOR FORECASTING AND CONTROLLING NEUROLOGICAL DISTURBANCES UNDER A MULTI-LEVEL CONTROL

Patent number:	EP1341580
Publication date:	2003-09-10
Inventor:	ESTELLER ROSANA (US); ECHAUZ JAVIER RAMON (US); LITT BRIAN (US); VACHTSEVANOS GEORGE JOHN (US)
Applicant:	TRUSTEES OF THE UNIVERSITY OF (US)
Classification:	
- international:	*A61B5/04; A61B5/0482; A61B5/07; A61N1/08; A61B5/00;* **A61B5/04; A61B5/0476; A61B5/07; A61N1/08;** A61B5/00; (IPC1-7): A61N1/18; A61B5/04; A61N1/08
- european:	A61B5/0482; A61B5/07D
Application number:	EP20010993260 20011211
Priority number(s):	WO2001US48035 20011211; US20000735364 20001212

Also published as:

- WO0249500 (A3)
- WO0249500 (A2)
- US6594524 (B2)
- US2002103512 (A1)
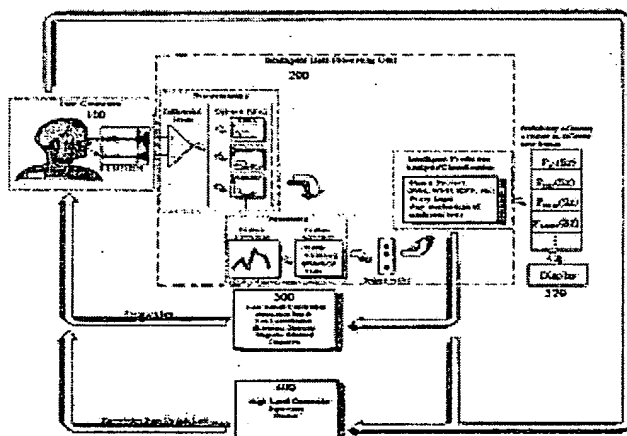- CA2425122 (A1)

Cited documents:

- WO0010455
- GB2336211
- US5995868
- US6018682

Report a data error here

Abstract not available for EP1341580
Abstract of correspondent: **US2002103512**

A method and apparatus for forecasting and controlling neurological abnormalities in humans such as seizures or other brain disturbances. The system is based on a multi-level control strategy. Using as inputs one or more types of physiological measures such as brain electrical, chemical or magnetic activity, heart rate, pupil dilation, eye movement, temperature, chemical concentration of certain substances, a feature set is selected off-line from a pre-programmed feature library contained in a high level controller within a supervisory control architecture. This high level controller stores the feature library within a notebook or external PC. The supervisory control also contains a knowledge base that is continuously updated at discrete steps with the feedback information coming from an implantable device where the selected feature set (feature vector) is implemented. This high level controller also establishes the initial system settings (off-line) and subsequent settings (on-line) or tunings through an outer control loop by an intelligent procedure that incorporates knowledge as it arises. The subsequent adaptive settings for the system are determined in conjunction with a low-level controller that resides within the implantable device. The device has the capabilities of forecasting brain disturbances, controlling the disturbances, or both. Forecasting is achieved by indicating the probability of an

oncoming seizure within one or more time
frames, which is accomplished through an inner-
loop control law and a feedback necessary to
prevent or control the neurological event by either
electrical, chemical, cognitive, sensory, and/or
magnetic stimulation.

Data supplied from the *esp@cenet* database - Worldwide